



Improve Process Insight with the Rosemount 3051S MultiVariable Pressure Transmitter with *WirelessHART*® Communications

Monitor more with wireless – even in remote and hard-to-reach locations – at a 40 to 60% savings over wired options and with 99%+ data reliability.

DISCOVER MORE

See what you can do with the Rosemount 3051S MultiVariable Wireless Pressure Transmitter at:

Open the door for new possibilities in process improvement. Learn how at:



Scan the code to learn more.

THE CHALLENGE

Limited labor resources and budgets can restrict your ability to make multiple measurements. With the Rosemount 3051S MultiVariable Wireless Pressure Transmitter, you can accurately measure multiple process variables and gain greater insight into your process.


ROSEMOUNT 3051S MULTIVARIABLE WIRELESS PRESSURE TRANSMITTER CAPABILITIES

Reduce Installation Costs

- Reduce pipe penetrations and impulse piping with industry leading 2-in-1 sensor technology
- Decrease deployment time and device commissioning with Emerson's wireless infrastructure

Improve Flow Measurement Accuracy

- Externally compensate for line pressure variations with integrated static pressure measurement
- Improve calibration accuracy and ease with a true gage static pressure sensor

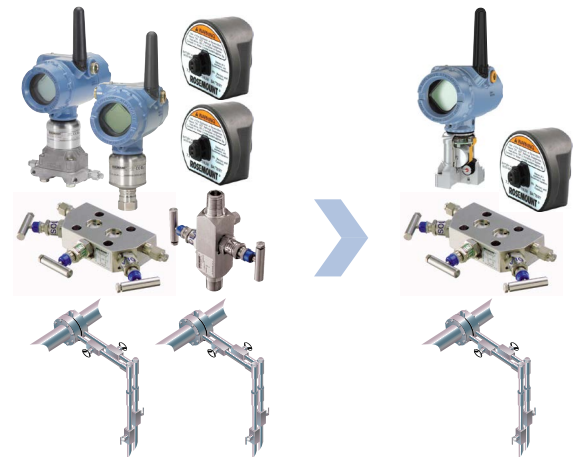

Current configuration

Rosemount 3051SMV Wireless configuration

ROSEMOUNT 3051S MULTIVARIABLE™ WIRELESS PRESSURE TRANSMITTER

SPECIFICATIONS

Differential Pressure

Reference Accuracy

+/- 0.04% of Reading (Ultra for Flow)

+/- 0.04% of Span (Classic)

Static Pressure Reference Accuracy

+/- 0.025% of Reading (Ultra for Flow)

+/- 0.055% of Span (Classic)

Antenna Ranges

Long Range: 225m (750 feet)

Extended Range: 800 m (1/2 mile)

High-Gain Remote: 1 km (2/3 mile)

Scaled Variable

Available on Differential Pressure Sensor

Square Root or Linear Offset Output

Display Type

3-Line LCD Display

Output

WirelessHART®

Pressure Ranges

DP: Up to 2,000 psi (137,9 bar)

SP: Up to 3,626 psi (250 bar)

Power Requirements

I.S. Black Power Module

(Up to 6.5-year life)

Hazardous Locations

Intrinsic Safety Approvals

COMMON APPLICATIONS

Enhanced Oil Recovery

- Steam injection
- CO₂ injection
- Water injection

With the Rosemount 3051S MultiVariable Wireless Pressure Transmitter, you can automate O&G fields faster and gain insight into remote operations. Because you capture two measurements with a single device, you can reduce maintenance headaches, spend less time on site and reduce costs. Additionally, you can ensure wellhead integrity and optimize injection rates.

Compressed Air Filters

- Measure pressure and differential pressure across filters and strainers

Use the Rosemount 3051S MultiVariable Wireless Pressure Transmitter to prevent plugged filters, protect equipment from debris, and measure line pressure without creating another pipe penetration.

Plant Utility Monitoring

- Steam and gas
- Compressed air
- Water

Optimizing energy production is difficult because you don't always have accurate energy measurements. With the Rosemount 3051S MultiVariable Wireless Pressure Transmitter, you can monitor flow and pressure in compressed air, steam and water systems to benchmark energy usage, identify energy saving opportunities throughout the plant and provide accurate internal billing.

Heat Exchangers

- Inlet and outlet flow rates and pressure to calculate efficiency

Fouling of tubes reduces efficiency and increases energy usage and cost. The Rosemount 3051S MultiVariable Wireless Pressure Transmitter provides early detection of fouling so you can schedule maintenance proactively.



Differential Pressure Sensor

Static Pressure Sensor

DISCOVER MORE

Learn more at:

© 2014 Emerson Process Management. All rights reserved.

The Emerson logo is a trademark and service mark of Emerson Electric Co. Rosemount is a mark of one of the Emerson Process Management family of companies.

The contents of this publication are presented for information purposes only, and while effort has been made to ensure their accuracy, they are not to be construed as warranties or guarantees, express or implied, regarding the products or services described herein or their use or applicability. All sales are governed by our terms and conditions, which are available on request. We reserve the right to modify or improve the designs or specifications of our products at any time without notice. Content of legal disclaimers is dependent on each business unit's legal requirements.

00803-0100-6164 03/14

Thị phần số 1 Việt Nam về
**GIẢI PHÁP QUAN TRẮC MÔI TRƯỜNG
& ĐO LƯỜNG CÔNG NGHIỆP**



Trụ sở chính

Số 4E, đường số 6, phường An Phú, Thành Phố Thủ Đức, Thành Phố Hồ Chí Minh.

Hotline: (+84) 901 379 116



Việt An Miền Bắc

Lô 33, khu BT4-1, dự án khu nhà ở Trung Văn, phường Trung Văn, quận Nam Từ Liêm, Hà Nội

Hotline: (+84) 901 851 116



Việt An Miền Trung

Số 5A Mai Xuân Thưởng, phường Hòa Khê, quận Thanh Khê, Thành Phố Đà Nẵng

Hotline: (+84) 898 119 116



Eurowater Technology

Số 9A, đường số 6, phường An Phú, TP. Thủ Đức, TP. Hồ Chí Minh.

Hotline: (+84) 909 788 959

Văn phòng Hà Tĩnh

Tổ dân phố Liên Phú, phường Kỳ Liên, thị xã Kỳ Anh, Hà Tĩnh

Hotline: (+84) 938 442 414